



TELEDYNE
ANALYTICAL INSTRUMENTS
Everywhereyoulook™

6400T Series

Sulfur Dioxide (SO₂) Analyzer and
Hydrogen Sulfide (H₂S) Analyzers
UV-Fluorescence Technology

FEATURES

- User-settable ranges, 0-50 ppb to 0-5,000 ppm
- Large, vivid, and durable color graphics display with touch screen interface
- Comprehensive internal data logging with programmable averaging periods
- Front panel USB connections for peripheral devices and firmware upgrades
- Adaptive signal filtering optimizes response time
- Temperature and pressure compensation
- Internal Zero & Span check (optional)
- Ability to log virtually any operating parameter
- Continuous self-checking with alarms



6400T Series - UV-Fluorescence SO₂ / H₂S Analyzers

The Teledyne Analytical Instruments (TAI) 6400T series analyzers use a proven UV fluorescence principle coupled with state-of-the-art microprocessor technology to provide accurate and dependable measurements of low level SO₂.

The 6400T-H₂S measures hydrogen sulfide (H₂S) by incorporating a catalytic converter set at 600°F (315°C) to oxidize H₂S into SO₂ while leaving other more difficult to oxidize sulfurs unconverted. A switching mode allows analysis of both H₂S and SO₂ concurrently.

Exceptional stability is achieved with the use of an optical shutter to compensate for PMT drift and a reference detector to correct for changes in UV lamp intensity.

A hydrocarbon "kicker" and advanced optical design combine to prevent inaccuracies due to interference. The multi-tasking software gives real time indication of many operational parameters and provides automatic alarms if diagnostic limits are exceeded.

ADVANCED PERFORMANCE

The 6400T series analyzers offer an advanced color display, capacitive touch screen, intuitive user interface, flexible I/O, and built-in data acquisition capability. It includes a built-in data acquisition capability using the analyzer's own internal memory. This allows the logging of multiple parameters including averaged or instantaneous concentration values, calibration data and operating parameters such as flow, pressure and lamp intensity.

Stored data are easily retrieved through the front panel or via RS232, Ethernet, or USB ports either locally or by remote connection using the included APIcom™ software. These innovative features allow operators to perform predictive diagnostics and enhanced data analysis by tracking parameter trends.

The 6400T series analyzers combine lighter weight, rugged construction, ease of use, powerful diagnostics, modular design and outstanding performance to meet air monitoring requirements.


CONFIGURATION

- Selectable voltage
- Internal pump
- Auto ranging and dual ranges
- 47mm diameter particulate filter
- 8 isolated digital status outputs
- Dual bi-directional RS-232
- Specified AC voltage and frequency
100V - 115V or 220V - 240V 50 Hz or 60 Hz
- Up to 4 analog outputs: 4-20mA (3 max) or
settable DC voltage (0-10V, 0-5V, 0-1V, 0-0.1V)

OPTIONAL EQUIPMENT

- Rack mount brackets (19") with chassis slides
- Rack mount brackets only
- RS-232 Cable
- Expendables Kit
- Spare Parts Kit
- Multi-drop RS-232 connection
- Ethernet port includes 7 ft. CAT-5 cable
(disables one serial port)
- Nitric oxide optical filter
(recommended for high NOx applications)
- Concentration alarm relays
- Calibration options:
 - Ambient zero and ambient span
 - Zero scrubber and pressurized span
 - Zero scrubber and internal span source (IZS)

6400T Schematic

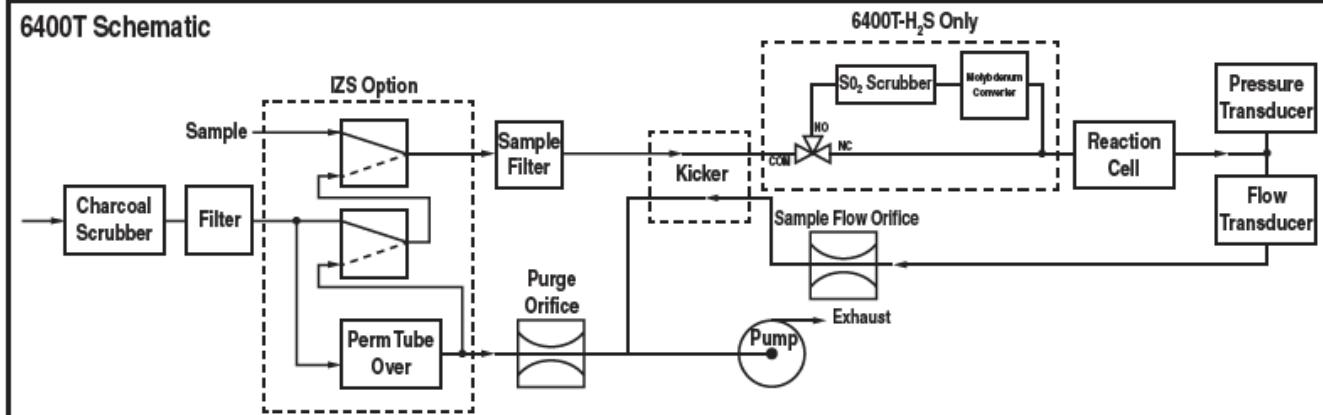

6400T Series - UV-Fluorescence SO₂ / H₂S Analyzers

SPECIFICATIONS	6400T	6400T H2S	6400TH
Detection	SO ₂ Analyzer	H ₂ S and SO ₂ Analyzer	High Range SO ₂ Analyzer
Ranges	Min: 0-50 ppb, full scale; Max: 0-20,000 ppb full scale; user selectable; dual ranges and auto ranging supported	Min: 0-50 ppb H ₂ S, 0-50 ppb SO ₂ full scale Max: 0-10,000 ppb H ₂ S, 0-20,000 ppb SO ₂ full scale user selectable; dual ranges and auto ranging supported	Min: 0-10 ppm full scale; Max: 0-5,000 ppm full scale; user selectable, dual ranges and auto ranging supported
Measurement Units	ppb, ppm, µg/m ³ , mg/m ³	ppb, ppm, µg/m ³ , mg/m ³	ppb, ppm, µg/m ³ , mg/m ³
Zero Noise	< 0.2 ppb (RMS)	< 0.2 ppb (RMS)	0.1 ppb (RMS)
Span Noise	< 0.5% of reading (RMS) above 50 ppb	< 0.5% of reading (RMS) above 50 ppb	0.2 ppm
Zero Drift	<0.5 ppb / 24 hours, <1 ppb / 7 days	<0.5 ppb of FS / 24 hours	< 1 ppm/24 hours
Span Drift	<0.5 ppb / 24 hours, <1 ppb /7 days	<0.5% of FS / 24 hours	< 0.5% of full scale/24 hours
Lag Time	20 seconds	20 seconds	5 seconds
Rise and Fall Time	<100 seconds to 95%	<120 seconds to 95%	<30 seconds to 95%
Linearity	1% of full scale	1% of full scale	1% of full scale
Precision	0.5% of reading above 50 ppb	0.5% of reading above 50 ppb	0.5 % of reading above 10 ppm
Sample Flow Rate	650 ml/min ±10%	650 ml/min ±10%	700 ml/min ±10 %

ELECTRICAL

Power Requirements	100V - 120V, 220V - 240V, 50/60 Hz
Recorder Offset	±10%

OUTPUTS

Included I/O	Up to 4 analog outputs: 4-20mA (3 max) or settable DC voltage (0-10V, 0-5V, 0-1V, 0-0.1V) 1 x Ethernet: 10/100Base-T 2 x RS232 (300-115,200 baud) 2 x USB device ports for firmware upgrades 8 x opto-isolated digital outputs 6 x opto-isolated digital inputs
Optional I/O	1 x USB communications port 1 x RS485 8 x analog inputs (0-10V, 12-bit) 4 x digital alarm outputs Multidrop RS232

PHYSICAL

Operating Temperature	5 - 40° C		
Dimensions (HxWxD)	7" x 17" x 23.5" (178 x 432 x 597 mm)		
Weight	35.7 lbs (16.2 kg)	41 lbs (18.3 kg)	31 lbs (14 kg)



CALIFORNIA OFFICE
CITY OF INDUSTRY, CA
UNITED STATES OF AMERICA (USA)
TEL: +1 626.934.1500

ASK_TAI@TELEDYNE.COM
WWW.TELEDYNE-AI.COM



40472 Düsseldorf
Wahlerstraße 12
Tel: +49 211 6696998-0
Fax: +49 211 6696998-99
info@berntgmbh.de

81245 München
Petzetstraße 8
Tel: +49 89 8110330
Fax: +49 89 8110331
www.berntgmbh.de

76646 Bruchsal
Werner-von-Siemens Str. 2-6
Tel: +49 7251 3084436
Fax: +49 7251 3084439